


8 CH 1080P Hybrid DVR

T1-DR-2M116-P1



Key Features

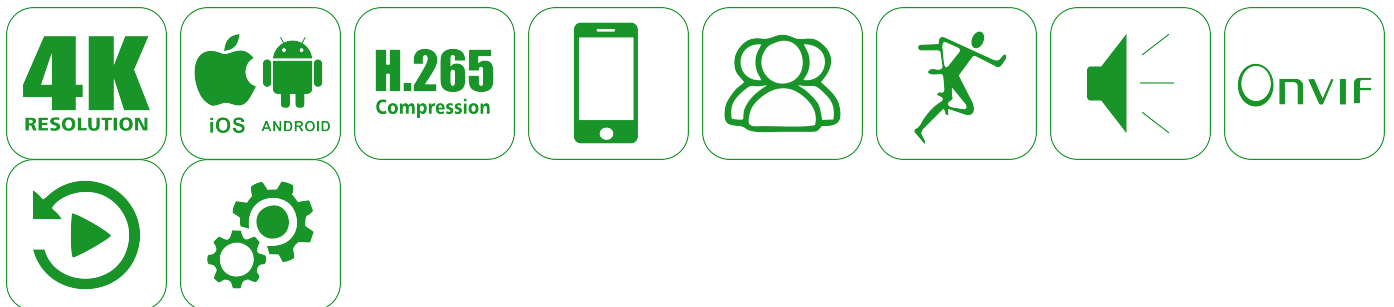

Features

16 CH 1080P Hybrid DVR

16 CH DVR supports 16 CH /5MP/1080P / 960P /720P IP video input

H.264/H.265/H.265+ video compression

HDTVI/AHD/CVI/CVBS/IP video input

Audio via coaxial cable

Up to 18-ch IP camera inputs (up to 5 MP)

Specifications

System	
Operating System	Embedded Linux

Video	
Analog Video Input	BNC × 16 BNC interface (1.0Vp-p; 75?) TVI/ AHD/CVI: 1080P/ 1080P Lite/ 720P/ 720P Lite/ WD1
IP Video Input	2 CH Up to 5 MP@25fps
Total Input	18 CH
Output	HDMI × 1 :1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 BNC × 1: CVBS(used as the main or spot output)
Compression	H.264/H.265/H.265+
Multi-screen Display	1/4/6/8/9/13/16/25
HDTVI Input	1080p25, 1080p30, 720p25, 720p30
AHD Input	1080p25, 1080p30, 720p25, 720p30
HDCVI Input	1080p25, 1080p30, 720p25, 720p30
CVBS Input	Support
Video Output Mode	HDMI/VGA simultaneous output

Audio	
Input	RCA ×1
Output	RCA × 1 (linear, 600?)
Two-way audio	Take up channel one audio input
Compression	G.711(U/A)
Audio Support	Audio via coaxial cable

Record	
Resolution	1080P Lite/ 720P/ 720P Lite/ WD1
Frame Rate	Analog Channel: 1080P Lite/720P/WD1: 25fps (PAL)/30fps (NTSC) (only CH 1 supports) 1080P Lite/720P/WD1: 12fps (PAL)/15fps (NTSC) (other channels support) 720P Lite: 25fps(PAL) / 30fps (NTSC) IP Channel: 25fps(PAL) / 30fps (NTSC)
Bit Rate	32Kbps ~ 4Mbps
Stream Type	Video, Video & Audio

Playback	
Playback	16 CH
Search	Time slice / time / event / tag search
Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events
Function	Play, pause, FF, FB, digital zoom, etc.

Alarm	
Mode	Manual, motion, exception, smart event
Input	No
Output	No

Network	
Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP
Incoming Bandwidth	16Mbps
Outgoing Bandwidth	80Mbps
Client Connection	Max. 10 users access

MobileDevice	
OS	iOS, Andriod


Storage	
HDD	SATA× 1, up to 8TB

Backup	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes

Port	
RS 485	No
USB	USB 2.0 × 2
Remote Controller	Optional

General	
Power Supply	DC12V / 2A
Consumption	? 10W (without HDD)
Dimensions(mm)	255 × 234 × 42 (W × D × H)
Working Environment	-10~50°C, 10%~90% (humidity)

Dimensions

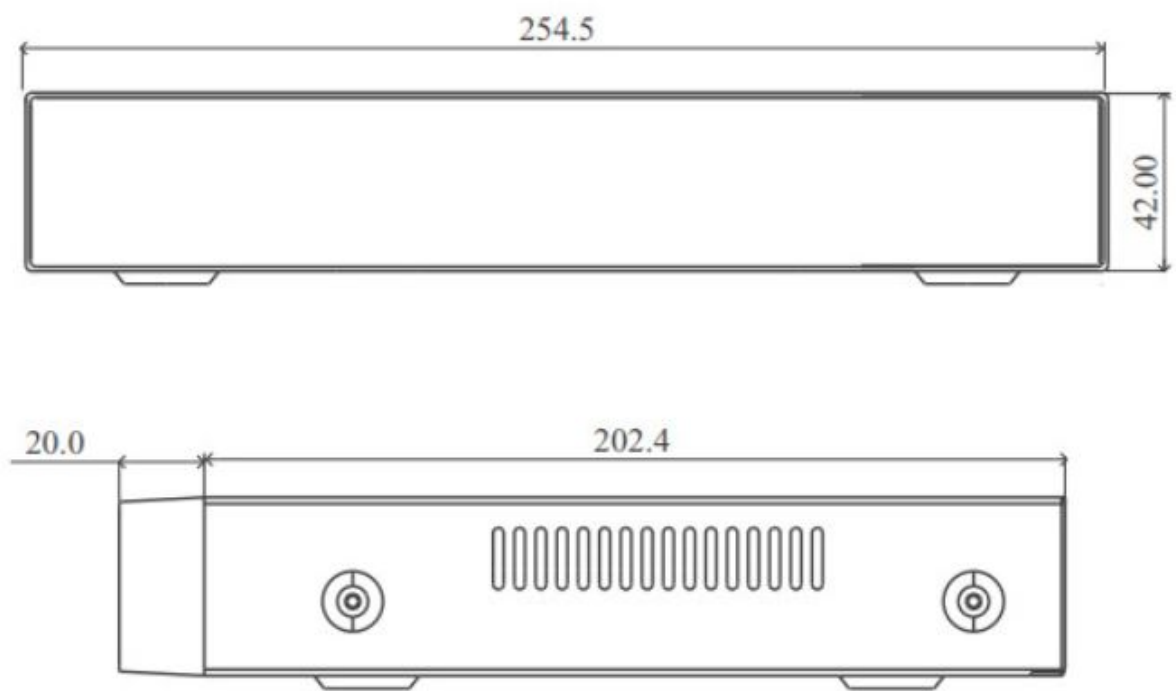

*Product specifications and availability are subject to change without notice.